
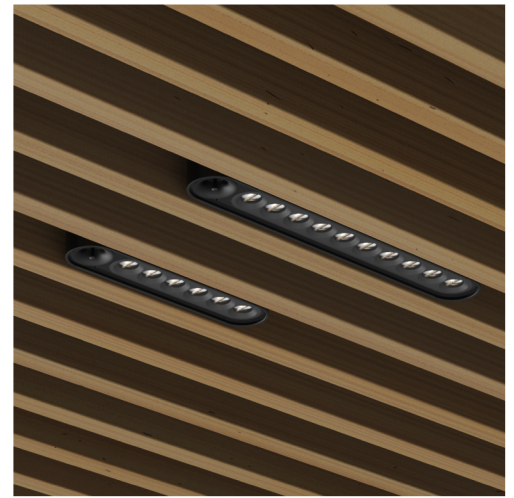


# Hero

# LightShift® adjustable luminaire

## Wood Grille

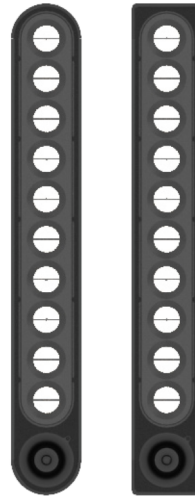

### PRODUCT DESCRIPTION

Hero adjustable luminaire with LightShift technology provides for beam adjustment with a joystick-actuated internal mechanism that does not move or reorient the luminaire body. Harmonious integration into the architecture and flexible installation into the tightest spaces. Fixed light emitting face orientation, precision optics, adaptive glare baffle, and advanced anti-reflective materials provide for exceedingly low glare. Available with a wide range of beam characteristics, shapes, colors, and mounting configurations.

### PERFORMANCE

Light Output	1290 (10 LED) and 775 (6 LED) lumens (3000 K)				
Efficacy	58 lumens/watt (3000 K)				
Color Temperature	2700, 3000, 3500, 4000 K				
Color Rendering	92 CRI				
Name	VN	NS	SP	WS	VW
Beam: Width	11°	14°	23°	36°	44°
Field angle	20°	25°	38°	59°	69°



Intertek  
5019771



	2700K	3000K	3500K	4000K
Lumens	1220	1290	1335	1390
CRI Ra	92	96	95	94
CRI R9	65	79	81	74
TM30 Rf	89	94	94	92
TM30 Rg	103	101	102	99
VN-11° CBCP	27712	29252	30330	32724
NS-14° CBCP	18379	19400	20115	21703
SP-23° CBCP	7206	7606	7886	8509
WS-36° CBCP	3212	3390	3515	3792
VW-44° CBCP	2375	2507	2599	2805

### ADJUSTMENT

Tilt	rated to ±40°
Pan	infinite (360° with no stops)


Scale 1.0x for 10 LED and 0.6x for 6 LED. Scale 1.21x for 80 CRI

### ELECTRICAL

Operating Power	23 W (10 LED) or 14 W (6 LED) 120-277 V, 50-60 Hz, power factor > 0.9
Dimming	1% phase, 0-10 V, or DALI, 0.1% optional

### MECHANICAL


Mounting	non-IC pan with adjustable brackets, direct mount (MOD)
Trim	none
Shape	rounded or rectangular
Height (above grille)	3.4" nominal
Hanger Length	14" to 24" standard, 12" to 48" optional
Slat Height	0.5" to 5.25", >5.25" requires MOD
Slat Spacing	>2.0", <2.0" requires cutting slats

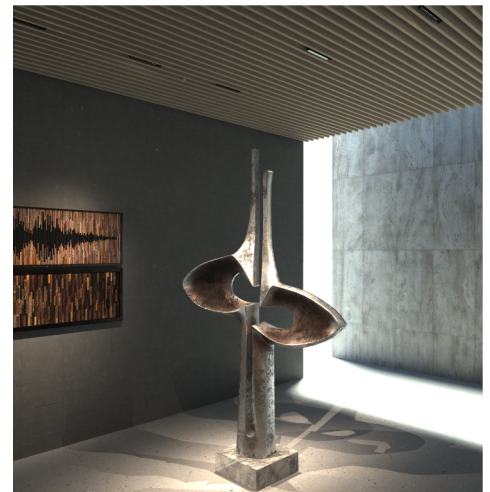


**PHOTOMETRICS**

Illuminance measured for 3000K with beam direction at 0° and 30°. Cone size is marked at 50% of peak illuminance. Photometric files available for download at <https://www.glintlighting.com/resources>.

Scale 1.0x for 10 LED and 0.6x for 6 LED. Scale 1.21x for 80 CRI

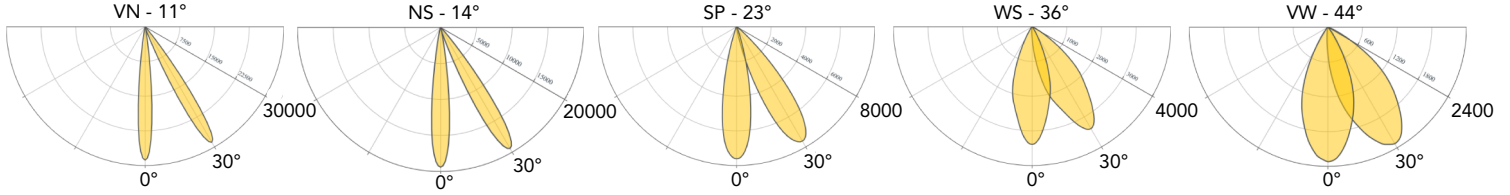

**DIMENSIONS**

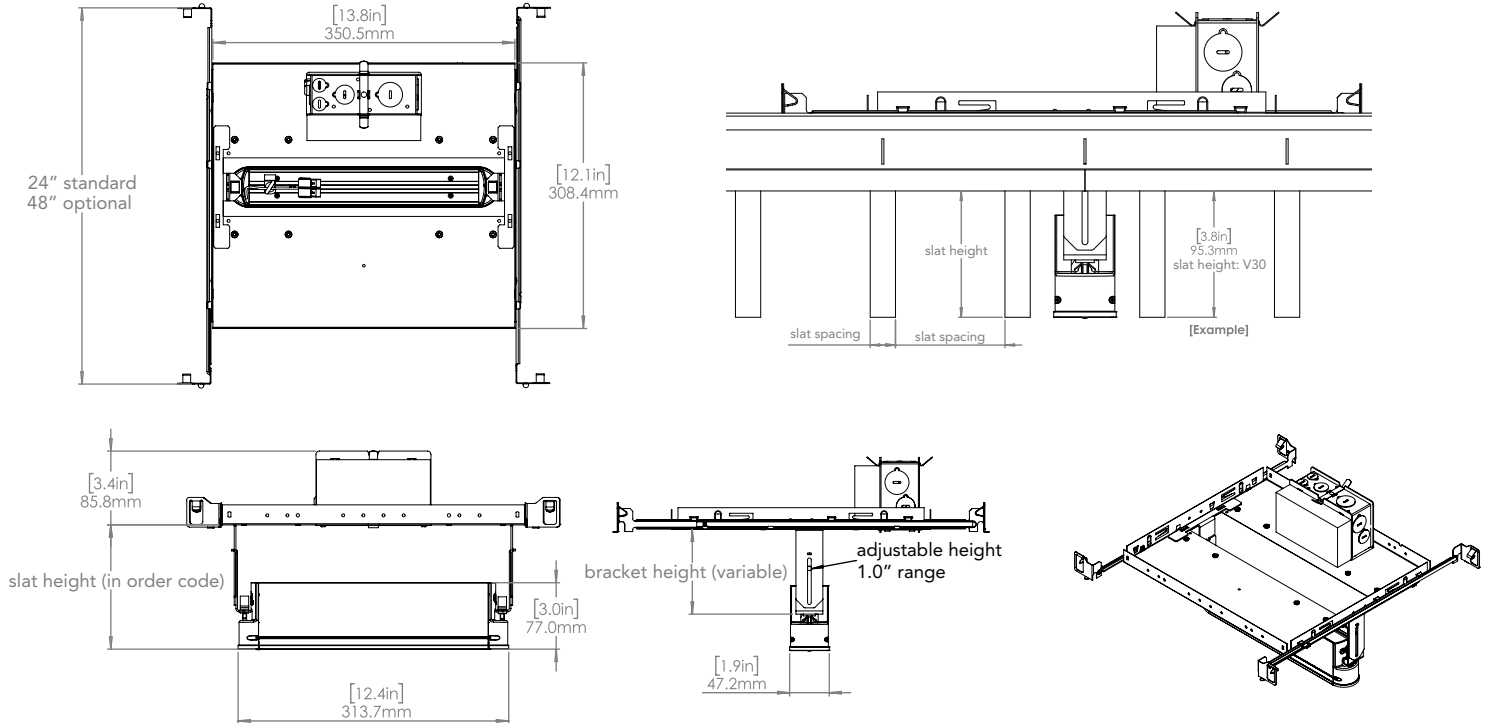

**ORDERING INFORMATION**

Please create order codes for your specification from the selections below. For custom requirements, please indicate X in the appropriate field and separately write out your request or contact us for a custom build or setup code.

<b>A1015G</b>			<b>BLK</b>			
<b>MODEL</b> A1015G Hero Grille	<b>SIZE</b> 10-1 10 LED 6-1 6 LED	<b>SHAPE</b> R rectangular P rounded	<b>COLOR</b> BLK black	<b>INSTALLATION</b> GPN wood grille pan GDR wood grille direct (MOD)	<b>SLAT HEIGHT</b> H05 0.5" horizontal H10 1.0" horizontal V20 2.0"- 2.99" vertical V30 3.0"- 3.99" vertical V40 4.0"- 5.25" vertical XSH custom slat height (MOD)	<b>VOLTAGE</b> U12 120V U27 277V
<b>DIMMING</b> E10 phase 1% T10 0-10V, 1% TX1 0-10V, 0.1% D10 DALI-2, 1% DX1 DALI-2, 0.1% EM1 0-10V, 1% EM 5W battery & microinverter	<b>CCT / CRI Ra</b> 2790 2700K 92 CRI 3090 3000K 92 CRI 3590 3500K 92 CRI 4090 4000K 92 CRI XCT custom	<b>BEAM SIZE</b> VN 11° NS 14° SP 23° WS 36° VW 44°	<b>LIGHT OUTPUT</b> SO standard XO custom	<b>MOUNTING</b> STK stock mounting BFB butterfly brackets CBH 48" bar hangers XBL custom	<b>CUSTOM SETUP</b> STD standard setup LIN linear dim curve --- custom	

Note: BFB and CBH are only for installation type GPN