

LETO 11.5

SUSPENDED WET LED CYLINDER




Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 2000 lumens.
- Five year warranty.

Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick

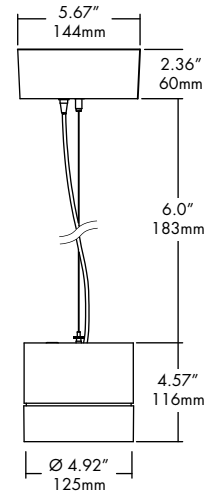

Technical Information

OUTPUT OPTIONS	700 lm	1000 lm	1500lm
Fixture wattage	6.1 W	9.1 W	14.0 W
Delivered Lumen at 3500K	647 lm	965 lm	1474 lm
Efficacy	106 lm/W	106 lm/W	105 lm/W
Center Beam Candlepower (10° Faceted Reflector)	5399 cd	8052 cd	12300 cd

CCT	Multiplier	CRI	TM-30		
			R _f	R _g	R ₉
2500K	0.81	92	90	104	77
2700K	0.92	92	91	102	61
3000K	0.97	95	92	102	61
3500K	1.00	95	93	101	72
4000K	1.07	95	92	103	68
6500K	1.05	96	91	100	89

Integral Driver Example: Fixture LET115W-S-07-25K-F10-CL-WH-WH-RD-WH-SS2-WH-PHSD-NA
 Remote Driver Example: Fixture LET115W-S-07-25K-F10-CL-WH-WH-RD-WH-SS2-WH-010L-NA
 HRM-LET115W-S-07-25K-010L-NA

Ordering Code

Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET115-Leto 11.5 Wet	S-Suspended	07-700 lumens (6.1W) ¹ 10-1000 lumens (9.1W) 15-1500 lumens (14.0W)	25K-2500K 27K-2700K 30K-3000K 35K-3500K 40K-4000K 65K-6500K	F10-10 Degree, Faceted F18-18 Degree, Faceted F30-30 Degree, Faceted F45-45 Degree, Faceted F60-60 Degree, Faceted S30-30 Degree, Smooth S45-45 Degree, Smooth S80-80 Degree, Smooth	CL-Clear Lens DL-Diffusing Lens	Standard WH-White BK-Black SL-Silver Premium ² MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick	Standard WH-White BK-Black SL-Silver Premium ² MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
RD-Round SQ-Square	Standard WH-White BK-Black SL-Silver Premium ² MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick	SS2-Solid Stem, 2' SS3-Solid Stem, 3' SS6-Solid Stem, 6'	Standard WH-White BK-Black SL-Silver Premium ² MA-Mocha CC-Charcoal CR-Cerulean FB-Firebrick	PHSD-Forward/Reverse Phase, 1% Dimming, 120V Only 010S-0-10V, 1% Dimming, 120/277V 0103-0-10V, 1% Dimming, 347V Only 010L-EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V ⁴ 010G-EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V ⁴ DALI-EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V DALI8-EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V ³ LUTE-Lutron Hilume Ecodigital, 1% Dimming, 120V/277V DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V ³	NA-None EMG-Emergency Driver ^{3,5} CSMB-Casambi ⁶ AWNR-Athena ⁶

1 - 700 lumens is not available with LUTE driver.
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
 3 - All drivers remote mounted when using DALI8 driver, DMX driver, or EMG driver options.
 4 - Requires square canopy SQ for integral driver, otherwise remote mounted.
 5 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.
 6 - AWNR/CSMB only available with 010S driver and RD/SQ canopy.

CONTACT FACTORY FOR MORE OPTIONS.


Canopy

RD Round Canopy



Integral Drivers	Remote Drivers
010S	010L
0103	010G
PHSD	DALI
	DALI8
	LUTE
	DMX

SQ Square Canopy



Integral Drivers	Remote Drivers
010S	DMX
0103	DALI8
PHSD	
010L	
010G	
DALI	
DALI8	
LUTE	

Please see next page for Remote Driver Housing details.

Suspension

SSX (2', 3', 6' max) Solid Stem



Lens & Accessory Options

OPTC-ACC-CL-94MM

Clear Lens
Also available with complete fixture, use ordering code.
-CL



Light Loss Factor: 100%*

OPTC-ACC-DL-94MM

Diffusing Lens
Also available with complete fixture, use ordering code.
-DL



Light Loss Factor: 87%*

*Light Loss Factor calculated with 60° faceted reflector.

Optics

RFLC-FXX-94MM

Faceted Reflector
Also available with complete fixture, use ordering code.
-F10/-F18/-F30/-F45/-F60



RFLC-SXX-94MM

Smooth Reflector
Also available with complete fixture, use ordering code.
-S30/-S45/-S60



FXX	Optic
F10	10° Faceted
F18	18° Faceted
F30	30° Faceted
F45	45° Faceted
F60	60° Faceted
S30	30° Smooth
S45	45° Smooth
S60	60° Smooth


Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	CCT	OUTPUT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET115W-S-Leto 11.5 Wet Suspended	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

HRM Single with Externally Mounted Driver

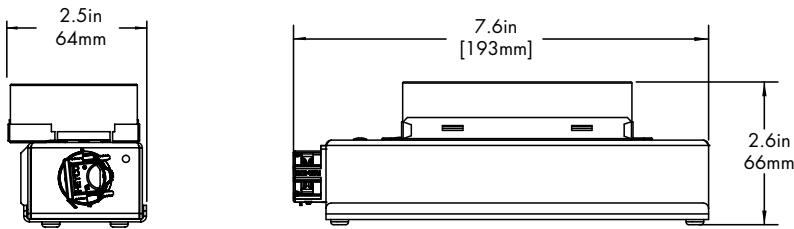


Canopy	+	Driver
RTL or RD	+	010L or 010G
RTL or RD	+	010S
RTL	+	010L or 010G or 010S
RTL or RD	+	DALI or LUTE

HRM Single

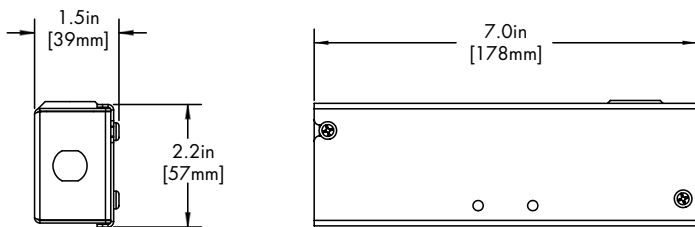

Canopy	+	Driver
RTL	+	PHSD


HRM Double

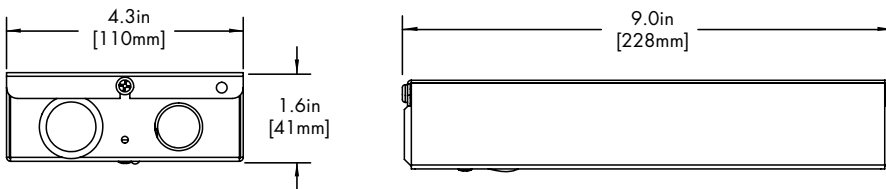

Driver
DALI8
DMX

EMG Emergency Driver

120 minute EMG operation time.

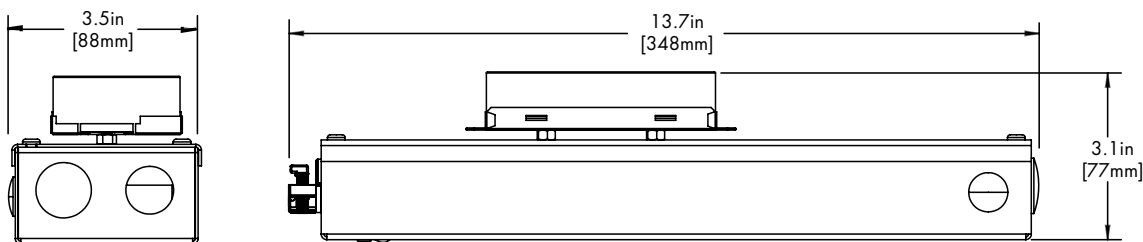

Driver
EMG

Standard Finishes

BK
Black



WH
White



SL
Silver



Premium Finishes


MA
Mocha




CC
Charcoal



CR
Cerulean






FB
Firebrick



Two Tone Finishes


Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.



TM-30

2500K


COLOR VECTOR GRAPHIC

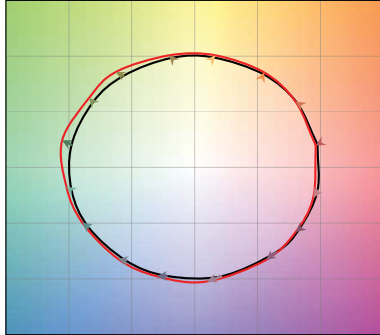

— Reference Source — Test Source

2700K


COLOR VECTOR GRAPHIC

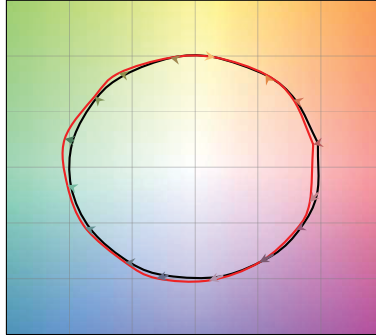

— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC

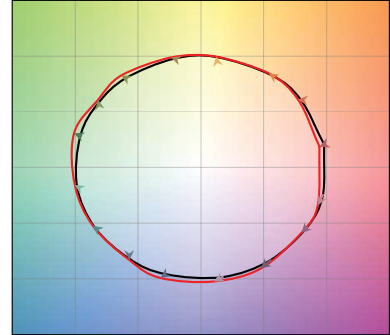

— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC

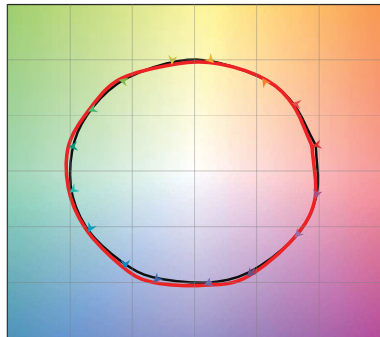

— Reference Source — Test Source

4000K


COLOR VECTOR GRAPHIC

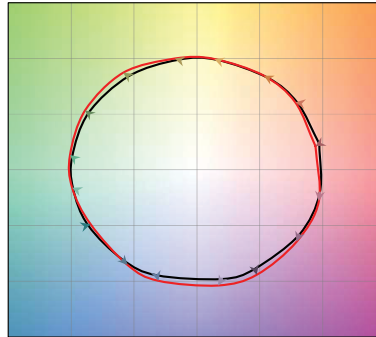

— Reference Source — Test Source

6500K



COLOR VECTOR GRAPHIC

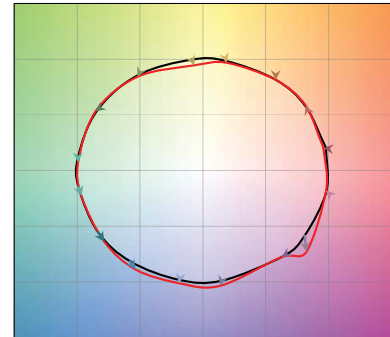



— Reference Source — Test Source

Photometry



10° Faceted Reflector

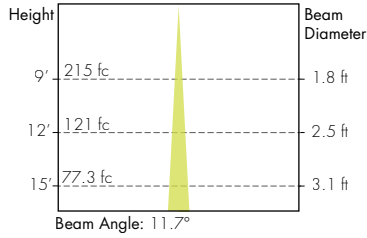



30° Smooth Reflector

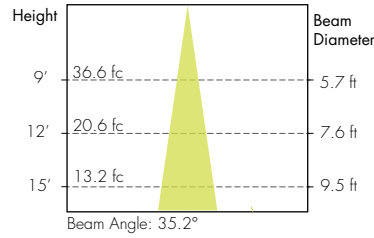



18° Faceted Reflector

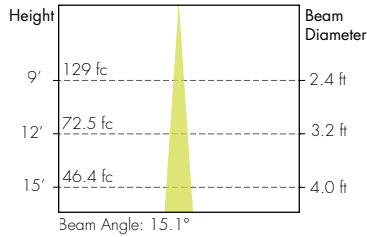



45° Smooth Reflector

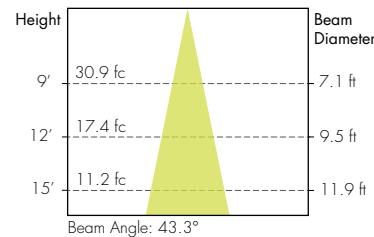



30° Faceted Reflector

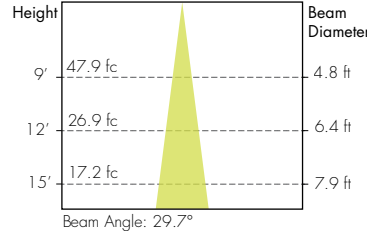

80° Smooth Reflector

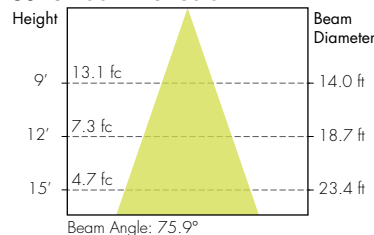

45° Faceted Reflector

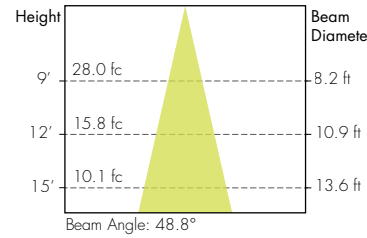

60° Faceted Reflector

